

(12) SOLICITUD INTERNACIONAL PUBLICADA EN VIRTUD DEL TRATADO DE COOPERACIÓN
EN MATERIA DE PATENTES (PCT)

(19) Organización Mundial de la Propiedad
Intelectual
Oficina internacional



(43) Fecha de publicación internacional
26 de Julio de 2001 (26.07.2001)

PCT

(10) Número de Publicación Internacional
WO 01/53130 A1

(51) Clasificación Internacional de Patentes⁷: B60N 2/46.
A47C 7/54

(72) Inventor; e

(75) Inventor/Solicitante (para US solamente): MARAÑÓN
MARQUINA, Miguel [ES/ES]; Calzadas, 7 - 2º B,
E-09004 Burgos (ES).

(21) Número de la solicitud internacional: PCT/ES01/00011

(74) Mandatario: CARPINTERO LOPEZ, Francisco; Her-
rero & Asociados, S.L., Alcalá, 35, E-28014 Madrid (ES).

(22) Fecha de presentación internacional:
17 de Enero de 2001 (17.01.2001)

(81) Estados designados (nacional): AE, AG, AL, AM, AT,
AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU,
CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,
MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL,
TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(25) Idioma de presentación:
español

(84) Estados designados (regional): patente ARIPO (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), patente
euroasiática (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

(26) Idioma de publicación:
español

(30) Datos relativos a la prioridad:


PCT/ES00/00014
17 de Enero de 2000 (17.01.2000) ES

(71) Solicitante (para todos los Estados designados salvo US):
GRUPO ANTOLIN-INGENIERIA, S.A. [ES/ES]; Car-
retera Madrid-Irún, Km. 244, 8, E-09007 Burgos (ES).

[Continúa en la página siguiente]

(54) Title: MECHANISM FOR REGULATING COLLAPSIBLE ELEMENTS

(54) Título: MECANISMO DE REGULACIÓN DE ELEMENTOS ABATIBLES

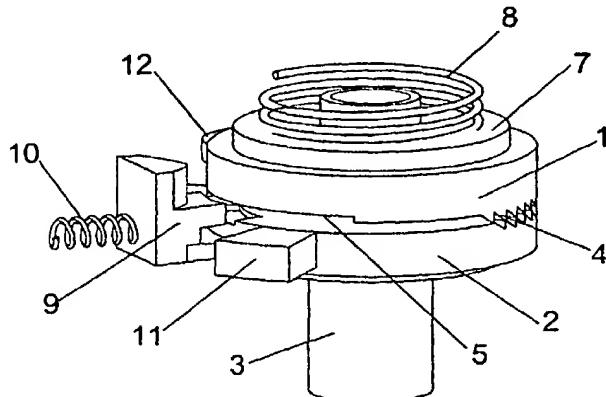

(57) Abstract: The invention concerns a mechanism comprising two discoid parts (1 and 2) mounted on a free axle (3), said parts (1 and 2) being provided with two toothed sectors (4) constantly meshing with one another in the opposite faces thereof. Part (1) defines a pawl, which is mounted on the mobile or collapsible element while part (2) forms a crown which is integral with the structure or fixed element in which the mechanism is applied. The pawl (1) is mounted on the axle (3) in such a way that it can move axially to enable separation of the teeth (4) and tilting of the mobile element in the direction opposite to that of collapsing or reassembly of the mechanism. The teeth (4) are separated by a separating element (9) disposed between the pawl (1) and the crown (2), said pawl (1) being automatically involved in the rotation of the pawl relative to the crown or can be manually actuated to bring about separation. The pawl (1) actuates the position of the gear relative to the crown (2) by means of a spring (8) that is supported on an external disk (7) which in turn presses against a stop plate (6) that is drawn on the axle (3) and mounted on the pawl (1).

[Continúa en la página siguiente]

WO 01/53130 A1